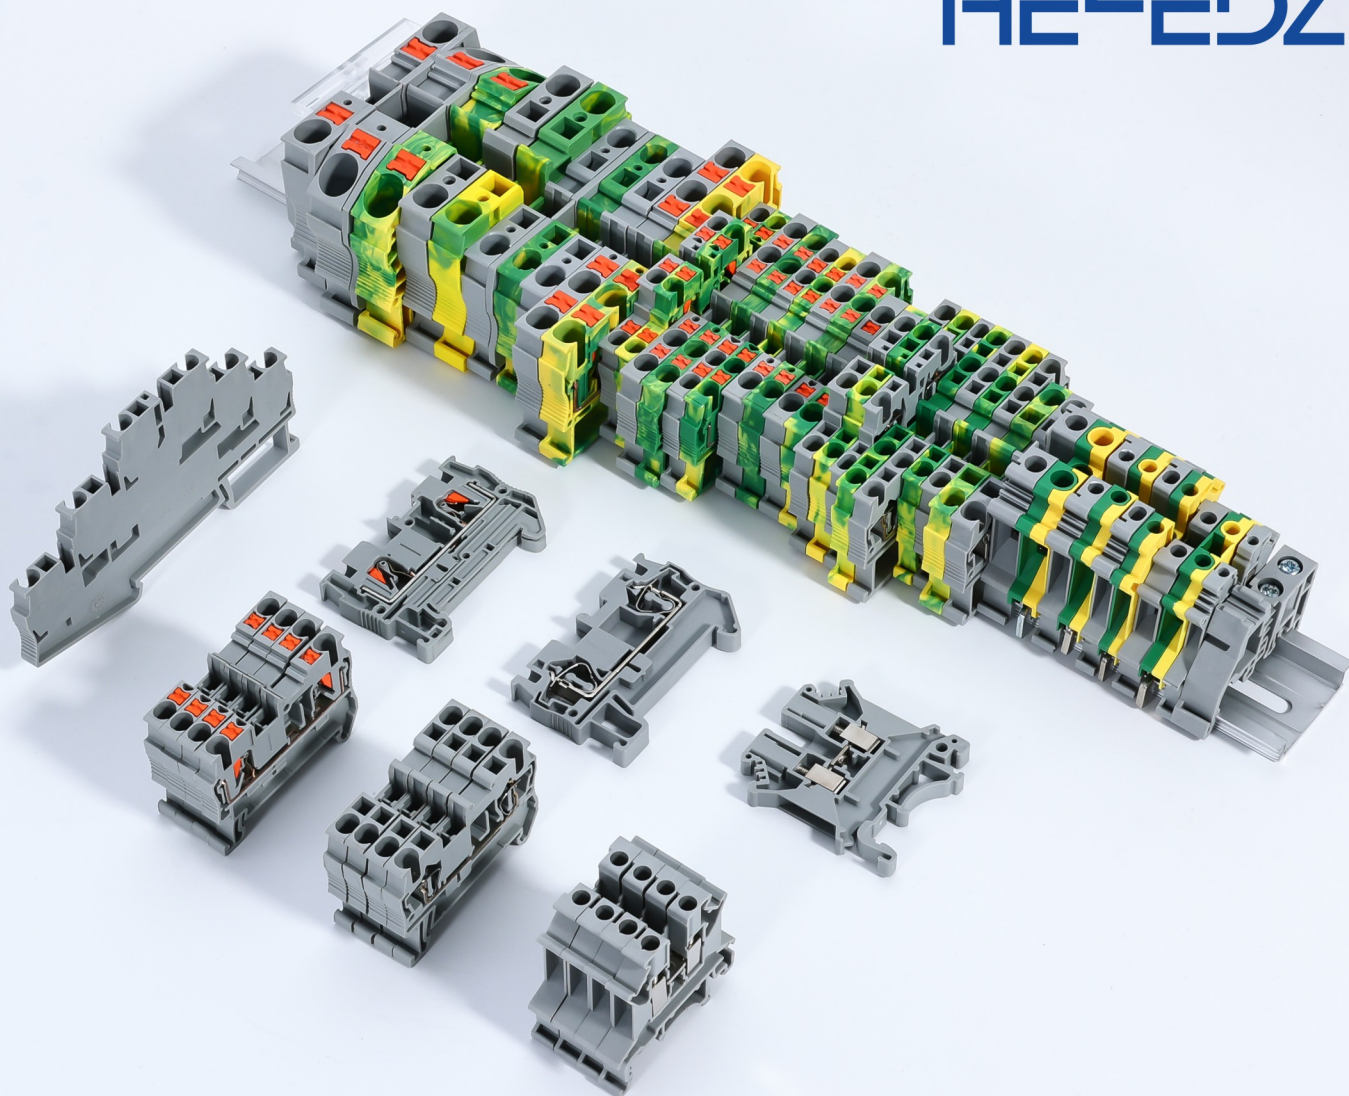


HELEDZ



接线端子 | 选型手册

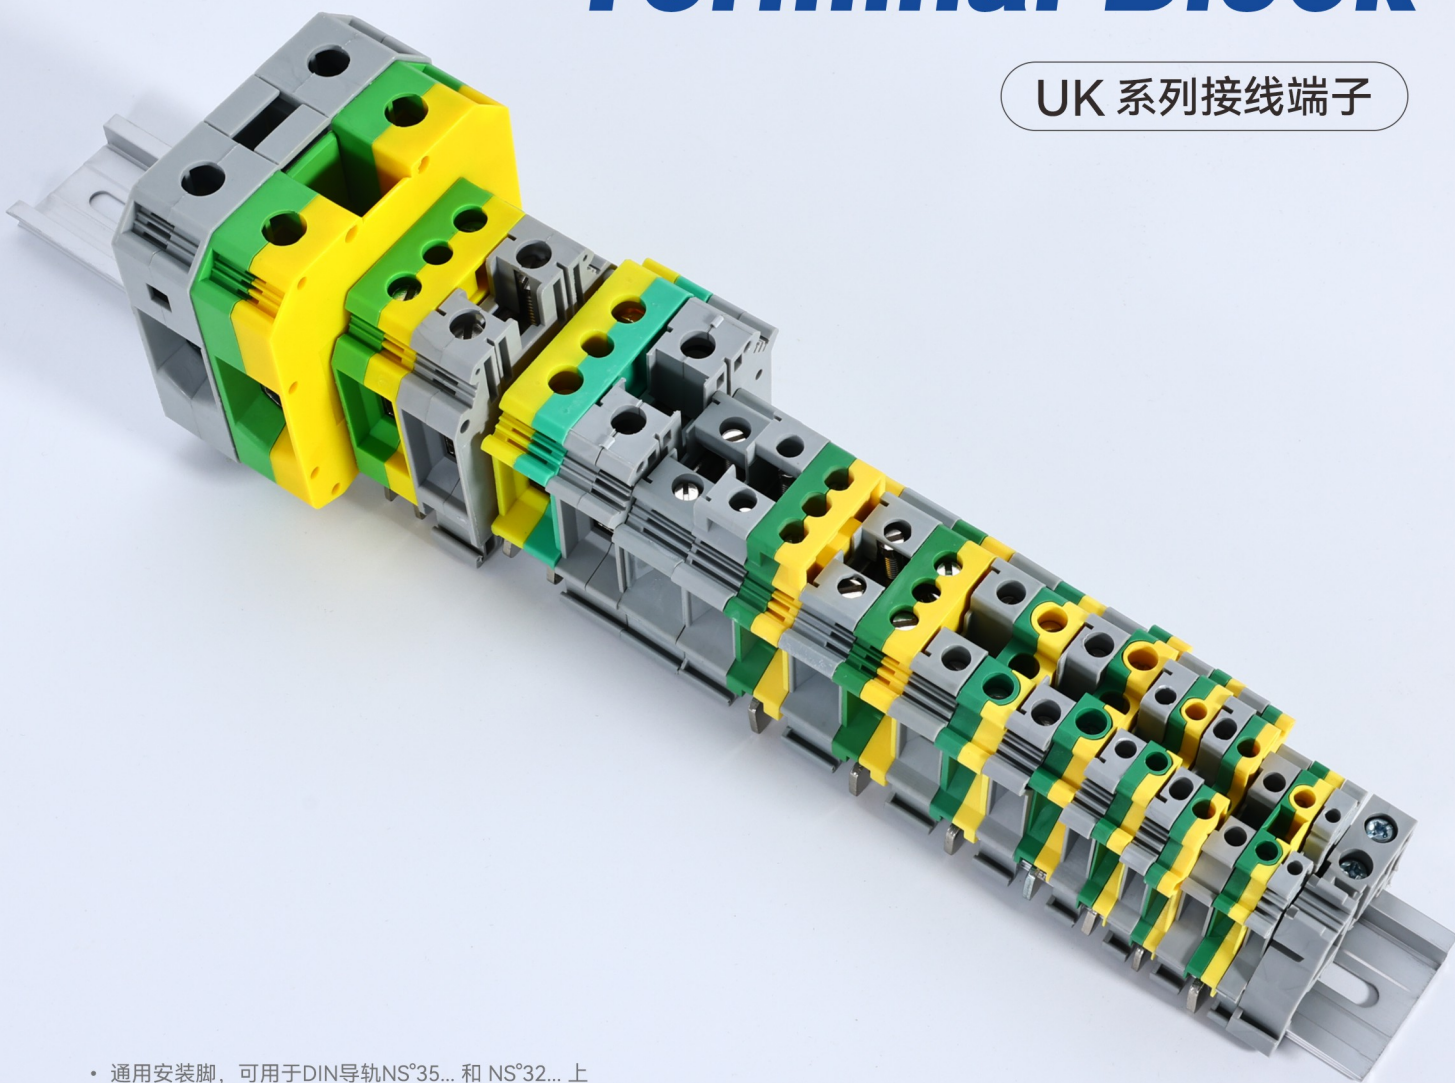
Terminal Block Selection Guide

温州合乐电子有限公司

WENZHOU HELE ELECTRONICS CO., LTD.















UK Series Terminal Block


UK 系列接线端子



- 通用安装脚，可用于DIN导轨NS°35... 和 NS°32... 上
- UK通用螺钉连接器拥有实际应用中所需要的特征
- 通过端子中央或边插式桥接件进行等电位分配

Focusing On Innovation Leading The Industry
专注创新·掌舵行业

				
UK-1.5N(HL)	UK-2.5B(HL)	UK-3N(HL)	UK-5N(HL)	UK-6N(HL)
				
UK-10N(HL)	UK-16N(HL)	UK-25N(HL)	UIK-35B(HL)	UK-35(HL)
				
UKH-50(HL)	UKH-95(HL)	UKH-150(HL)	UK5-TWIN(HL)	UDK-4(HL)
				
MBKKB-2.5(HL)	UKK3(HL)	UKK5(HL)	UKKB5(HL)	DIKD1.5(HL)
				
ASKIEN(HL)	UK5-HESI(HL)	UK10N-DREHSI(HL)	URTK/S(HL)	USLKG-2.5(HL)

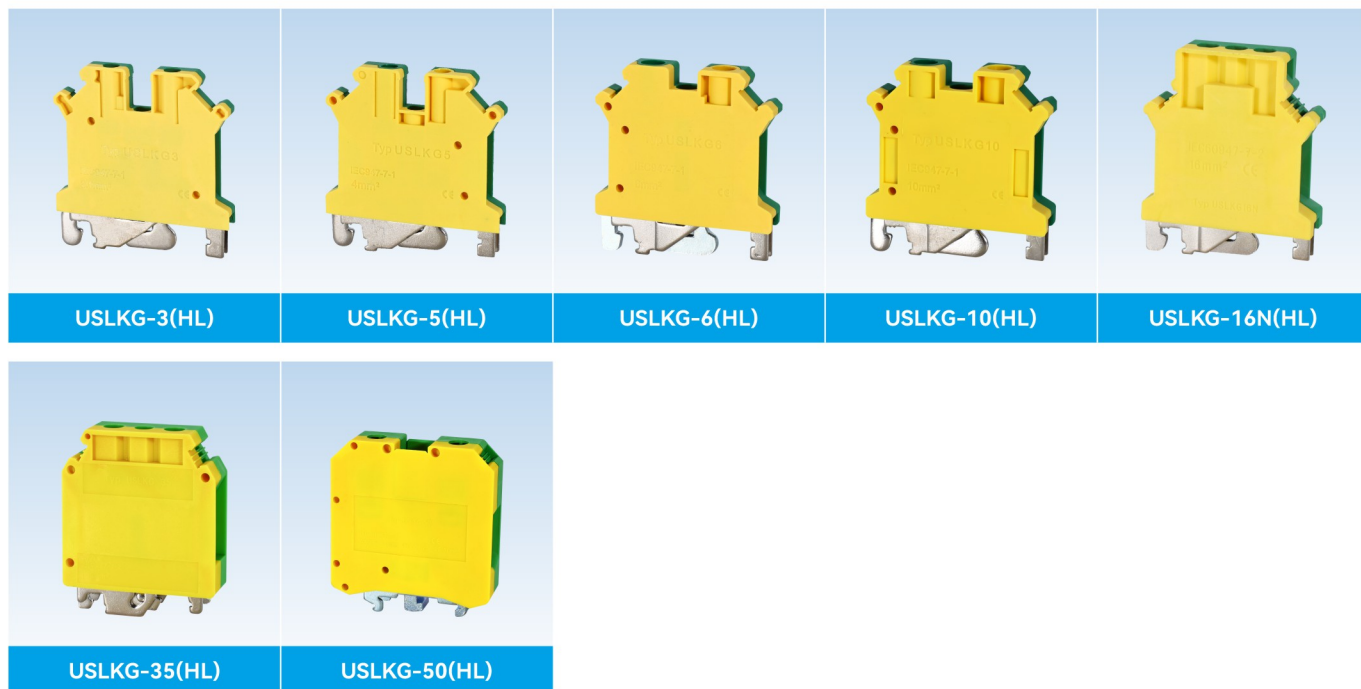

UK 系列	螺钉式 1.5mm ² 端子	螺钉式 2.5mm ² 端子	螺钉式 2.5mm ² 端子	螺钉式 4mm ² 端子	螺钉式 6mm ² 端子	螺钉式 10mm ² 端子
(电流/电压)	690V/17.5A	800V/32A	800V/32A	800V/41A	800V/57A	800V/75A
(厚/宽/高)	4.2/42.5/47.0mm	6.2/42.5/40.8mm	5.2/42.5/46.0mm	6.2/42.5/46.0mm	8.2/42.5/46.0mm	10.2/42.5/46.0mm
(线径)	0.2-2.5/mm ²	0.2-2.5/mm ²	0.2-2.5mm ²	0.2-4.0mm ²	0.2-6.0mm ²	0.2-10.0mm ²
(螺钉规格/扭力)	M2/0.22-0.75N·M	M3/0.5-1.3N·M	M3/0.5-1.1N·M	M3/0.5-1.3N·M	M4/0.5-2.1N·M	M4/0.5-2.1N·M
(剥线长度)	7mm	7mm	8mm	8mm	10mm	10mm
(绝缘材料/阻燃等级)	PA66/VO	PA66/VO	PA66/VO	PA66/VO	PA66/VO	PA66/VO
(额定冲击电压)	6KV/3	8KV/3	8KV/3	8KV/3	8KV/3	8KV/3
灰色端子	UK1.5N(HL)	UK2.5B(HL)	UK3N(HL)	UK5N(HL)	UK6N(HL)	UK10N(HL)
蓝色端子		UK2.5B BU(HL)	UK3N BU(HL)	UK5N BU(HL)	UK6N BU(HL)	UK10N BU(HL)
红色端子		UK2.5B RD(HL)	UK3N RD(HL)	UK5N RD(HL)	UK6N RD(HL)	UK10N RD(HL)
橙色端子		UK2.5B OR(HL)	UK3N OR(HL)			
黄色端子		UK2.5B YE(HL)				
绿色端子		UK2.5B GE(HL)				
黑色端子		UK2.5B BK(HL)	UK3N BK(HL)			
挡板	D-UK2.5(HL)	D-UK2.5B(HL)	D-UK4-10(HL)	D-UK3/10	D-UK4-10(HL)	D-UK4-10(HL)
10 位连接件	FBI 10-4(HL)	FBI 10-6(HL)	FBI 10-5(HL)	FBI 10-6(HL)	FBI 10-8(HL)	FBI 10-10(HL)
10 位连接件+绝缘套		FBI 10-6 JY(HL)	FBI 10-5 JY(HL)	FBI 10-6 JY(HL)		
边插式连接件		EBI 10-6(HL)	EBI 10-5(HL)	EBI 10-6(HL)	EBI 10-8(HL)	EBI 10-10(HL)
空白标记条	ZB4(HL)	ZB6(HL)	ZB5(HL)	ZB6(HL)	ZB8(HL)	ZB10(HL)
印字标记条	ZB4-C(HL)	ZB6-C(HL)	ZB5-C(HL)	ZB6-C(HL)	ZB8-C(HL)	ZB10-C(HL)
分组隔板	ATP-UK(HL)	ATP-UK(HL)	ATP-UK(HL)	ATP-UK(HL)	ATP-UK(HL)	ATP-UK(HL)
小隔板	TS/KK3(HL)	TS/KK3(HL)	TS-K(HL)	TS-K(HL)	TS-K(HL)	TS-K(HL)
固定件	E/UK(HL)	E/UK(HL)	E/UK(HL)	E/UK(HL)	E/UK(HL)	E/UK(HL)
标记夹	KLM-A(HL)	KLM-A(HL)	KLM-A(HL)	KLM-A(HL)	KLM-A(HL)	KLM-A(HL)
标记座-小	UBE/D(B1)(HL)	UBE/D(B1)(HL)	UBE/D(B1)(HL)	UBE/D(B1)(HL)	UBE/D(B1)(HL)	UBE/D(B1)(HL)
标记座-大	UBE/D(B2)(HL)	UBE/D(B2)(HL)	UBE/D(B2)(HL)	UBE/D(B2)(HL)	UBE/D(B2)(HL)	UBE/D(B2)(HL)
UK 系列	螺钉式 16mm ² 端子	螺钉式 35mm ² 端子	螺钉式 50mm ² 端子	螺钉式 95mm ² 端子	螺钉式 150mm ² 端子	螺钉式 240mm ² 端子
(电流/电压)	800V/101A	800V/150A	1000V/150A	1000V/232A	1000V/309A	1000V/415A
(厚/宽/高)	12.2/42.5/52.8mm	15.2/50/62.0mm	20.0/72.0/73.0mm	26.5/84.0/88.1mm	31.0/101.0/108.0mm	36.8/100.0/121.0mm
(线径)	0.2-16.0mm ²	0.2-35mm ²	16-50mm ²	35-95mm ²	50-150mm ²	70-240mm ²
(螺钉规格/扭力)	M4/0.5-2.1N·M	M6/0.5-4.0N·MM	M6/0.5-4.0N·M	M8/0.5-20.5N·M	M10/0.5-30.5N·M	M10/0.5-30.5N·M
(剥线长度)	10mm	16mm	24mm	33mm	40mm	40mm
(绝缘材料/阻燃等级)	PA66/VO	PA66/VO	PA66/VO	PA66/VO	PA66/VO	PA66/VO
(额定冲击电压)	8KV/3	8KV/3	8KV/3	8KV/3	8KV/3	8KV/3
灰色端子	UK16N(HL)	UK35N(HL)	UKH50(HL)	UKH95(HL)	UKH150(HL)	UKH240(HL)
蓝色端子	UK16N BU(HL)	UK35N BU(HL)	UKH50(HL)			
红色端子						
橙色端子						
黄色端子						
绿色端子						
黑色端子						
挡板	D-UK16(HL)					
10 位连接件	FBI 10-12(HL)	FBI 10-15(HL)				
10 位连接件+绝缘套						
边插式连接件						
空白标记条	ZB12(HL)	ZB12(HL)	ZB12(HL)	ZB12(HL)	ZB12(HL)	ZB12(HL)
印字标记条	ZB12-C(HL)	ZB12-C(HL)	ZB12-C(HL)	ZB12-C(HL)	ZB12-C(HL)	ZB12-C(HL)
分组隔板	ATP-UK(HL)					
小隔板	TS-K(HL)					
固定件	E/UK(HL)	E/UK(HL)	E/UK(HL)	E/UK(HL)	E/UK(HL)	E/UK(HL)
标记夹	KLM-A(HL)	KLM-A(HL)	KLM-A(HL)	KLM-A(HL)	KLM-A(HL)	KLM-A(HL)
标记座-小	UBE/D(B1)(HL)	UBE/D(B1)(HL)	UBE/D(B1)(HL)	UBE/D(B1)(HL)	UBE/D(B1)(HL)	UBE/D(B1)(HL)
标记座-大	UBE/D(B2)(HL)	UBE/D(B2)(HL)	UBE/D(B2)(HL)	UBE/D(B2)(HL)	UBE/D(B2)(HL)	UBE/D(B2)(HL)